

Combo Excelsior Hybrid®: Technical data



5602.301 - 1000 L
Ext. (mm) 1219 x 1016 x 1147
Int. (mm) 1142 x 935 x 943
Weight (Kg) 105
Folded height (mm) 374
Stacked height (mm) 1126.7
Folding ratio (%) 70

Lid included, Hybrid bottom discharge


Mechanical performances :

Unit load: 1500 kg
Stack load: 6500kg (4/1)
Dynamic load: 3200 kg (1/1)

Features :

- Solid walls
- Reinforced solid smooth base
- 3 runners
- Lid included

Lid: unique features

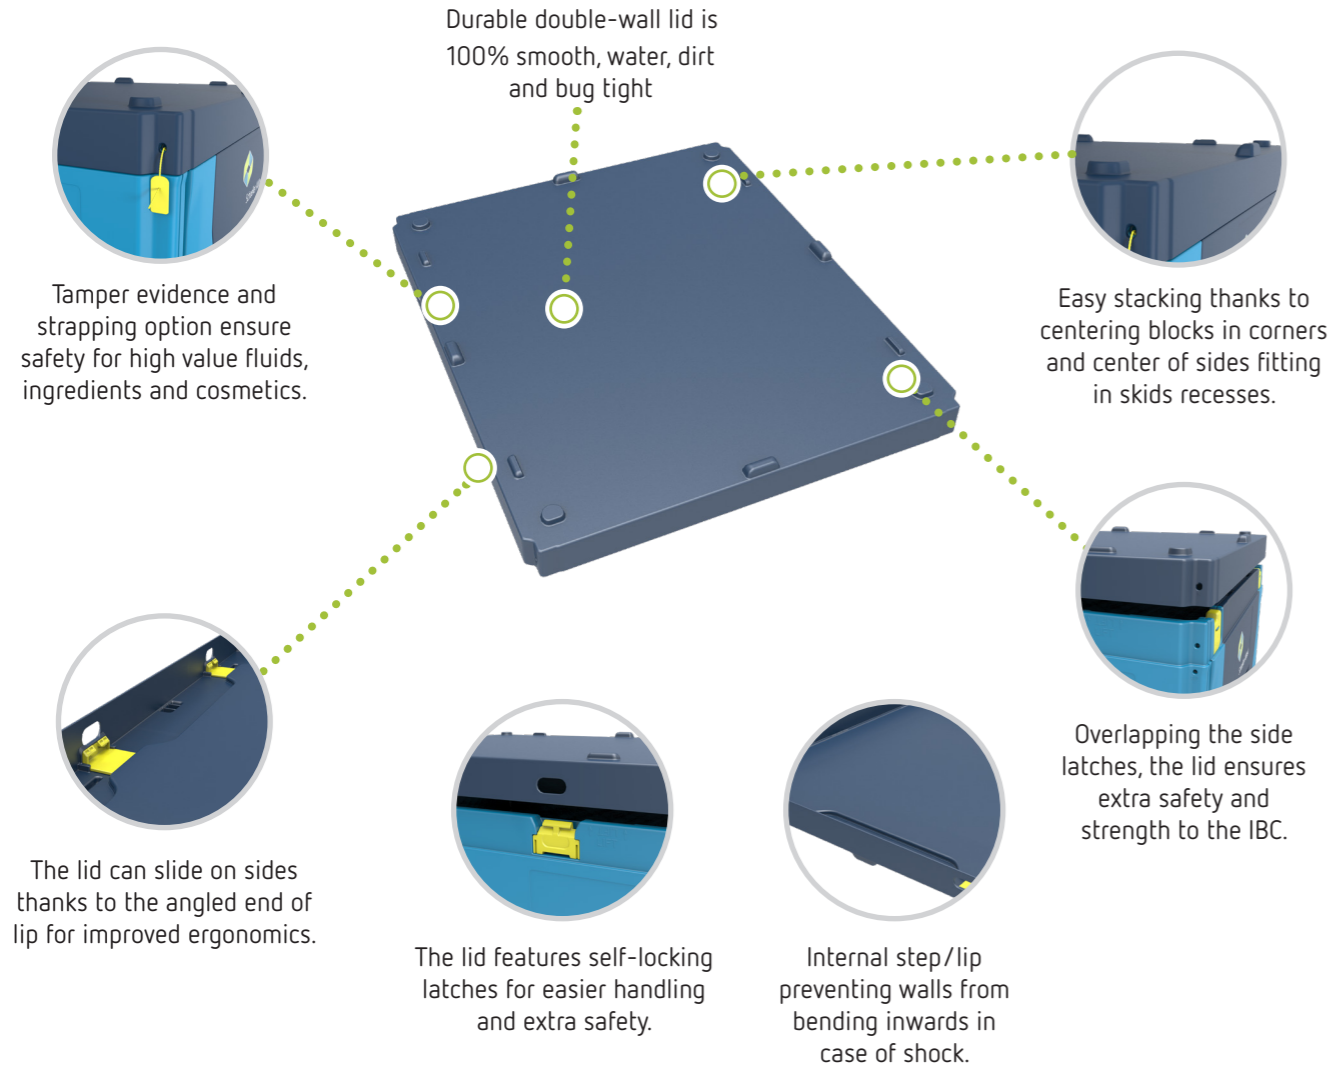

Schoeller Allibert
Innovating your logistics for a better world



Please visit our website
www.schoellerallibert.com

360°

Schoeller Allibert Returnable Plastic Packaging Solutions

 Combo Excelsior Hybrid®



Schoeller Allibert
Innovating your logistics for a better world

In line with its policy of continuous development, Schoeller Allibert reserve the right to amend product specifications described in this catalogue without prior notice. Most of our products are protected by patent, registered design or copyright. Texts, characteristics, pictures and plans are not contractual. Created 06/2020.

Combo Excelsior Hybrid®: The new standard folding IBC

Safe, hygienic and efficient for food processing, cosmetics and pharmaceutical industries

Outstanding performance

The Combo Excelsior Hybrid® is strong and durable. Maximum safety when stacked fully loaded thanks to the T-shaped locking system.

The lid is water-tight, self-locking and features multiple strap locations.



Automated handling

The Combo Excelsior Hybrid® is fully compatible with most automated handling systems.



Customization «Smart» RTP

Multiple identification and tracking options possible. The bar code labels and RFID & IOT pockets enable efficient fleet management.

Upgrade your supply chain

Combo Excelsior Hybrid® ensures optimised payload in road and railroad transportation. Reducing reverse logistics costs and lowering CO₂ impact thanks to the best folding ratio on the market.





The most hygienic and safe foldable IBC

100% safe, easy to clean design from base to lid, no dirt or water traps, bugs and needle contamination proof. 100% smooth and double-wall sturdy design increases internal volume and ensures compatibility with high-speed filling processes. Safe and speed handling thanks to the fork tine guides on base.

Improved handling and labor saving


Easily erected and folded by one operator only. The self-locking drop door enables easy access. The bottom discharge zone speeds up the liner and valve set up and removal. Faster removal thanks to easy valve release system. The reusable dustcover ensures bottom discharge protection against dirt which can be sealed with "one way"

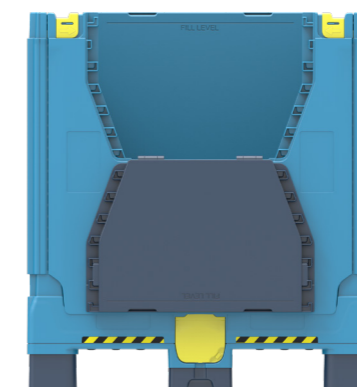


Maintenance

All parts can be replaced, maximizing the life span of the Combo Excelsior Hybrid®.

Thanks to the patented close up bayonet fixing system, the skids can be easily replaced.



DN50 Valve with adapter




Speedy® valve

Improved bottom discharge zone

Compatible with DN50 with Releasy® clip and Speedy® valve that goes along with our new Releasy® mechanism. This mechanism enables much safer and easier handling of the fitment and valve while significantly reducing the chance of damage.

Combo Excelsior Hybrid®

Strong, safe and hygienic



Usable in temperature environment from -20°C up to +40°C